


EDAN

NEW

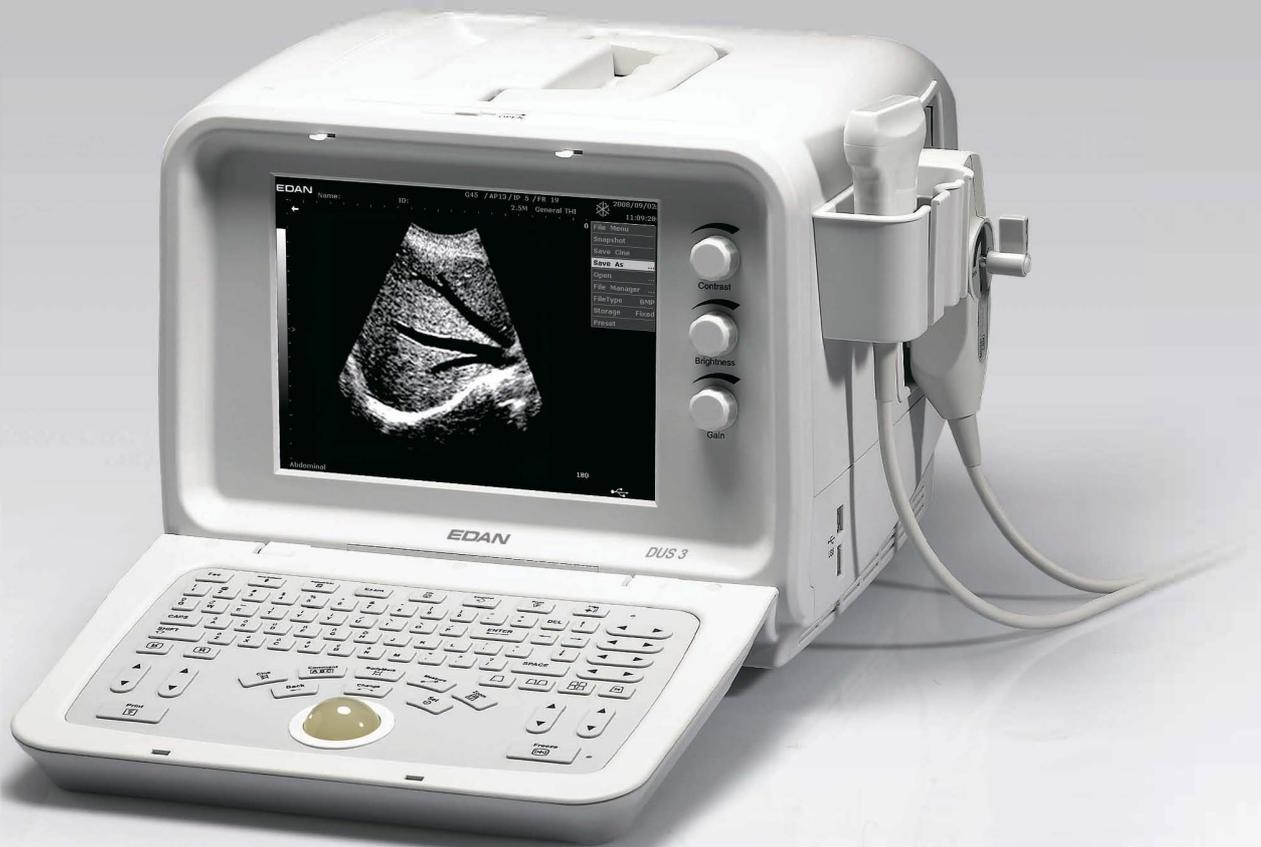

DUS 3

Digital Ultrasonic Diagnostic Imaging System

Complete images solutions and economic price make EDAN's DUS 3 meet challenges in today's ultrasound market. With its full digital technology and high performance transducers, DUS 3 provides the elegant images quality as an ideal portable working station. It will meet your daily diagnostic requirements, without any compromise in image quality, at an economic price.

DUS 3

Digital Ultrasonic Diagnostic Imaging System

Technical Specifications

General:

Imaging mode: B,B+B,4B, B+M,M
Gray scales: 256
Display: 10" non-interlaced
Transducer frequency: 2.0 ~ 10MHz
Transducer connector: 1 (standard) 2 (optional)
Beam-forming: Digital Beam-forming
Dynamic Receiving Focusing
Real-time Dynamic Aperture
Dynamic Frequency Scanning
Dynamic Apodization
Tissue Harmonic Imaging
Tissue Specific Imaging
Scanning angle: from 30 to 155 degree (depending on transducers)
Scanning depth (mm): from 20 to 250 (depending on transducers)

Imaging Processing:

Pre-processing: Dynamic range
Edge enhancement
Frame correlation
Line correlation
Smooth
AGC
4-segment TGC adjustment
IP (Image Process)

Post-processing: Gray map

Gamma correction
Rejection
Left-right reverse
Up-down reverse

Functions:

Cine loop: 128 frames bidirectional cine-loop
Zoom: X1.0, X1.2, X1.4, X1.6, X2.0, X2.4, X3.0, X4.0 in distance
Storage media: Built-in Flash, External USB-Memory stick
Storage: 56MB permanent image
Body mark: > 80 types
Transducer auto-detection
16-segment acoustic power output adjustment

Measurement & Calculation:

B-mode: distance, circumference, area, volume, angle, ratio, %stenosis
M-mode: distance, time, velocity, heart rate (2 cycles), slope
Software packages: abdomen, gynecology, obstetrics, urology, small parts, cardiology, orthopedics

Multi-frequency transducers



Display:

Date, Time, Probe Name, Probe Frequency, Frame Rate, Patient Name, Patient ID, Hospital Name, Measurement Values, Body Marks, Annotation, Probe Position, Full-image-region edit

Others:

Peripheral port: Video output 1
VGA output port 1
USB port 2
DICOM3.0 1 (optional)
Power supply: 100V-240V ~ 50Hz/60Hz
Dimensions: 353mm(W) X 315mm(L) X 253mm(H)
Net weight: 11.5 kg

Standard Configurations:

DUS 3 main unit
10" non-interlaced monitor
One transducer connector
128 frames cine loop memory
56MB built-in image storage
Two USB ports
Measurement & calculation software packages
Convex array transducer: C361-1 (2.0/3.0/4.0/5.0/6.0MHz)
One cable holder

Options:

Linear array transducer: L741 (6.0/7.0/8.0/9.0/10.0MHz)
Endorectal transducer: E741 (6.0/7.0/8.0/9.0/10.0MHz)
Endovaginal transducer: E611-1 (4.5/5.5/6.5/7.5/8.5MHz)
Micro-convex array transducer: C321-1 (2.0/3.0/4.0/5.0/6.0MHz)
Convex array transducer: C341 (2.0/3.0/4.0/5.0/6.0MHz)

Two Transducer Connectors

Video printer
Laser printer
Biopsy guide
DICOM3.0
Footswitch
Mobile trolley
Hand carried bag

Trolley



Edan Instruments, Inc.

All rights reserved.

Features and specifications are subject to change without notice



ENG-US-DUS3-V1.2-20091130